




# PANEL GLIDE SYSTEMS

PANEL GLIDE 5.2

# vertilux®

wherever there's a window

**AVAILABLE IN TWO, THREE, FOUR OR FIVE CHANNEL TRACK, THE PANEL GLIDE SYSTEM OFFERS EFFECTIVE LIGHT AND SHADE CONTROL AND UV PROTECTION ACROSS LARGE EXPANSES OF WINDOW MAKING IT THE PERFECT BLIND FOR LARGER WINDOWS, OFFICES, PATIOS AND SLIDING DOORS.**

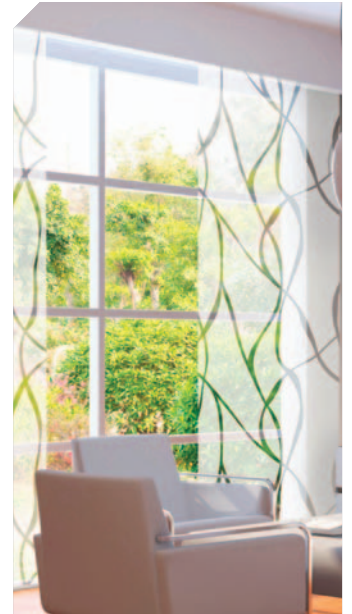

Panels may be free-floating and individually adjusted. Alternatively, panels may be collected and follow a lead panel in sequence to open and close. Recommended panel sizes range from 300mm (minimum) to 1100mm (maximum).

All panels may stack together to either the left or right, or panels may be split so that half stack at the right and half at the left.

Available in a range of fabric styles and colours, Vertilux Panel Glides are easy to use and may be operated with either a wand or traversing cord control.

The Vertilux fabric range spans an enormous variety of styles and colours incorporating the latest in textile designs and technology. Each fabric is designed to meet stringent standards in light control, glare reduction

and insulation from harmful UV rays. Superior heat reflection properties assist in maintaining an energy efficient and comfortable living environment.

## TECHNICAL DATA

AVAILABLE SYSTEMS	MINIMUM WIDTH	MAXIMUM WIDTH	MAXIMUM DROP	RECOMMENDED PANEL SIZES
Panel Glide 5.2	300mm	5450mm	3800mm	Minimum 300mm Maximum 1100mm

BLINDS PROUDLY MADE IN AUSTRALIA

info@vertilux.com.au vertilux.com.au

MELBOURNE | SYDNEY | CANBERRA | PERTH | BRISBANE | ADELAIDE | HOBART | DARWIN

