






SOLAR MOTORISED ROLLER BLIND SYSTEMS

- SINGLE SOLAR MOTORISED 1.20a
- MULTILINK SOLAR MOTORISED 1.20b
- DOUBLE SOLAR MOTORISED 1.21a
- MULTILINK DOUBLE SOLAR MOTORISED 1.21b

VERTILUX ARE PROUD TO PRESENT THE VERTILUX SOLAR MOTORISED ROLLER BLINDS - THE NEXT INNOVATION IN BLIND OPERATION

VERTILUX SOLAR MOTORISED ROLLER BLINDS ARE FULLY SELF-SUSTAINED BY HARNESSING THE SUN'S ENERGY THROUGH STATE-OF-THE-ART TECHNOLOGIES IN SOLAR POWER AND POWER MANAGEMENT NEGATING THE NEED FOR HARDWIRING, SORRY MR ELECTRICIAN, NO 240V POWER NEEDED HERE!!

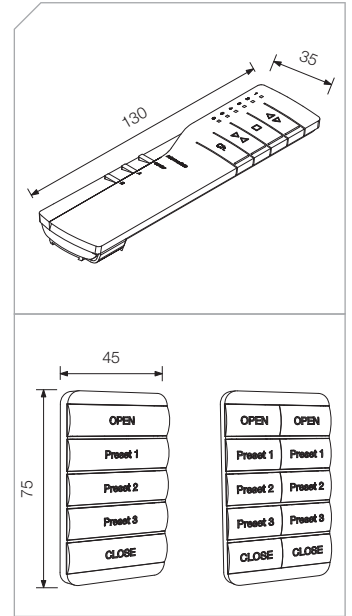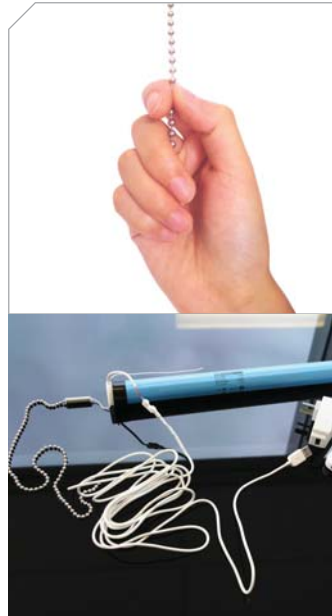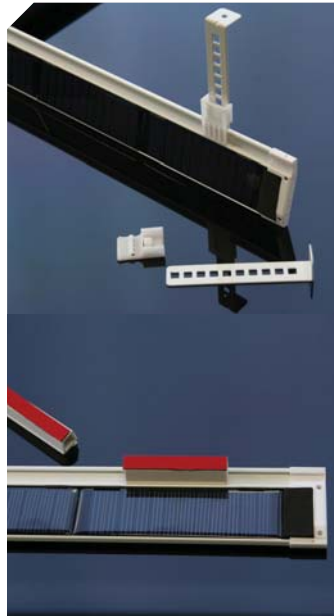

You can control the blind operation with a Tug Chain. No child safety control devices are required as the Tug Chain will allow you to do away with the problem of meeting the safety standards set by the Trade Practices (Consumer Product Safety Standard – Corded Internal Window Coverings) Regulations 2010.

To truly achieve the maximum benefit, the blinds can be operated from almost anywhere in the room with a wireless wall switch, choosing

from a 1 or 2 channel unit or a 6 channel hand held remote control unit.

There are optional Solar Panel sizes depending on the amount of sun exposure your windows receive. Vertilux Solar Motorised Roller Blinds are also suitable for windows set back from direct sunlight, such as sliding doors into a patio/outdoor setting and office windows facing East and South or with external façades or almost anywhere an automated blind is required.

The maximum size of blinds is approximately 9 square meters, e.g. 3m x 3m; 2.5m x 3.6m; 2m x 4.5m. So depending on the size of your windows, one solar charged motor may operate a Double Roller Blind System or Multilink 2 blinds to operate from the same motor. The Solar Motorised Roller System is backed by our 5 year warranty.

TECHNICAL DATA

AVAILABLE SYSTEMS	MINIMUM WIDTH	MAXIMUM WIDTH	MAXIMUM DROP	MAXIMUM SIZE OF BLIND
Single Solar Motorised 1.20a	530mm	3000mm	3000mm	9m ²
Multilink Solar Motorised 1.20b	530mm	3000mm	2500mm	7.5m ²
Double Solar Motorised 1.21a	530mm	3000mm	3000mm	9m ²
Multilink Double Solar Motorised 1.21b	530mm	3000mm	2500mm	7.5m ²

SPECIFICATIONS

Rated power	~10W	Max blind load	5.0kg
Input voltage	5-9V DC	Nominal speed	25RPM
Charging current	≤180mA	Operating temp.	0-40°
Max running time	2 minutes	Operating humidity	≤80% RH

BLINDS PROUDLY MADE IN AUSTRALIA

info@vertilux.com.au vertilux.com.au

MELBOURNE | SYDNEY | CANBERRA | PERTH | BRISBANE | ADELAIDE | HOBART | DARWIN



PRINTED ON RECYCLED PAPER 